

New Style, Slim & Smart Wideband Receiver


Menu-Driven User Interface and Easy-to-See Category Icons

The 4-Way cursor buttons provide quick and easy navigation.



One-Touch Search Button

Easily detects new active channels within a designated frequency range or fixed category.




One-Touch Scan Button

The link scan dynamically adds and deletes a category or a group to the scan list, even while scanning.

Efficient 3-Level Memory Management

A total of 1600 memory channels can be classified in 3 levels: by "Category" (up to 26 categories), by "Group" (up to 100), and "Memory name" (up to 100).

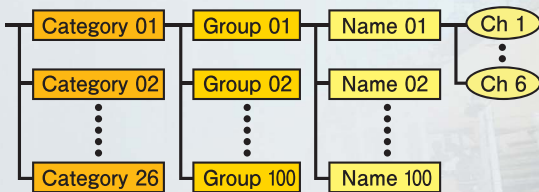

Computer Programmable with Optional CS-RX7 Software

0.150-1300MHz Wide Frequency Coverage

(* Cellular blocked in the USA version)

Slim, Stylish and Light Weight

Only 23 mm (29/32 in) slim depth and weighing just 200g (7.1oz (approx) with BP-244 and antenna).

Tone control function and audio filter*

(* AM/WFM mode only)



Other features

- Splash resistant construction equivalent to IPX4
- Large, backlit full dot-matrix display
- High speed scan and high speed search (100ch/sec.)
- CTCSS/DTCS decode with pocket beep function
- VSC (Voice Squelch Control)
- Built-in RF-gain control and attenuator
- Built-in AM bar antenna
- Earphone antenna function for FM broadcast RX
- VFO mode operation
- CI-V PC remote control capability with optional CT-17
- Weather alert function (USA version only)
- Auto power save function
- DC power jack for external DC operation

SPECIFICATIONS

GENERAL

- Frequency coverage : 0.150–1300.000MHz*
(* Cellular blocked in the U.S.A. version.)
- Mode : AM, FM, WFM
- No. of memory channels: 1825 (1600 regular, 25 scan edges and 200 automatic write memory)
- Usable temperature range : -10°C to +60°C
; +14°F to +140°F
- Frequency stability : ±6ppm (-10°C to +60°C)
- Tuning steps : 5, 6.25, 7.5, 8.33*, 9*, 10, 12.5, 15, 20, 25, 30, 50, 100, 125 and 200kHz
(* Selectable depending on operating bands.)
- Battery requirement : 3.7V DC (with BP-244)
4.5V DC (LR6 (AA) ×3 cells with BP-262)
- External power supply : 5.1–6.9V DC (with CP-18A/E)
- Current drain (at 3.7V DC) :
Rated audio 150mA typ. (Backlight off)
Stand-by 100mA typ. (Backlight off)
Power save 35mA typ. (Duty=1:4)

- Antenna impedance : 50Ω (SMA)
- Dimensions (W×H×D) : 57×128×23 mm;
(projections not included) 2¼×5½×29/32 in
- Weight (approx.) : 200g; 7.1oz
(With BP-244 and antenna)

RECEIVER

- Intermediate frequencies :
FM, AM 429.1, 19.65, 0.450MHz
WFM 429.1, 20.75, 1.55MHz
- Sensitivity (except spurious points) :
FM (12dB SINAD, 1kHz, 3.5kHz deviation)
1.625– 4.995MHz Less than 0.56µV
5.000–246.995MHz Less than 0.4µV
247.000–832.995MHz Less than 0.56µV
833.000–1300.000MHz* Less than 0.79µV
(* USA version only)
851.000–866.995MHz Less than 1.3µV
896.000–1300.000MHz Less than 0.79µV
WFM (12dB SINAD, 1kHz, 52.5kHz deviation)
76.000–108.000MHz Less than 1.8µV
175.000–221.995MHz Less than 1.8µV
470.000–770.000MHz Less than 2.5µV

- AM (10dB S/N, 1kHz 30% modulation with external antenna)
0.495– 4.995MHz Less than 2.5µV
5.000–29.995MHz Less than 1.8µV
118.000–136.000MHz Less than 1.8µV
222.000–246.995MHz Less than 1.8µV
247.000–329.995MHz Less than 1.8µV

- Selectivity :
FM, AM More than 15kHz/–9dB
Less than 30kHz/–60dB
More than 150kHz/–6dB
WFM More than 150kHz/–6dB
- AF output power : More than 60mW
(at 3.7V DC, 10% distortion, 70% modulation with an 8Ω load)
- External SP connector : 3-conductor 3.5 (d) mm
(½") /8Ω

Supplied accessories

- Battery pack, BP-244*
- Belt clip, MB-112G
- Handstrap
- * Depending on version
- Antenna, FA-S270C
- AC adapter BC-149A/D, 153SA*

All stated specifications are subject to change without notice or obligation.

OPTIONS

- **BP-244** 3.7V/1100mAh Li-Ion BATTERY PACK
Provides 8 hours of continuous receive capability.
(at rated audio, backlight off)
- **BP-262** BATTERY CASE
Battery case for LR6 (AA)×3 cells.
- **BC-149A/D, BC-153SA** WALL CHARGERS
6V DC, 1A output. Same as supplied.
- **CP-18A/E** CIGARETTE LIGHTER CABLE
6V DC, 2A output from 12V cigarette lighter socket.
- **CS-RX7 CLONING SOFTWARE**
Use a PC to easily edit stored memory channel data.
OPC-478UC, USB cable is included.
- **CT-17** CI-V LEVEL CONVERTER
For receiver remote control from a PC.
- **OPC-474** CLONING CABLE
Used for receiver-to-receiver data cloning.
- **OPC-478/UC** CLONING CABLES
OPC-478: RS-232C type. OPC-478UC: USB type.
- **HP-4** HEADPHONE
Light weight monaural headphone.
- **SP-13** EARPHONE
Provides clear audio even in noisy environments.
- **MB-112G** BELT CLIP Same as supplied.
- **LC-170** CARRYING CASE
Helps protect the receiver from scratches, etc.
- **AD-92SMA** ANTENNA CONNECTOR ADAPTER
Allows you to connect a BNC-type antenna.



Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in the United States, the United Kingdom, Germany, France, Spain, Russia and/or other countries. All other trademarks are the properties of their respective holders.

Icom Inc.

1-1-32, Kami-minami, Hirano-ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013 URL: <http://www.icom.co.jp/world/index.html>

Count on us!

Icom America Inc.

2380 116th Avenue NE,
Bellevue, WA 98004, U.S.A.
Phone: +1 (425) 454-8155
Fax: +1 (425) 454-1509
E-mail: sales@icomamerica.com
URL: <http://www.icomamerica.com>

Icom New Zealand

146A Harris Road, East Tamaki,
Auckland, New Zealand
Phone: +64 (09) 274 4062
Fax: +64 (09) 274 4708
E-mail: inquiries@icom.co.nz
URL: <http://www.icom.co.nz>

Icom (UK) Ltd.

Unit 9, Sea St, Herne Bay,
Kent, CT6 8LD, U.K.
Phone: +44 (0)1227 741741
Fax: +44 (0)1227 741742
E-mail: info@icomuk.co.uk
URL: <http://www.icomuk.co.uk>

Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road,
Taipei, Taiwan, R.O.C.
Phone: +886 (02) 2559 1899
Fax: +886 (02) 2559 1874
E-mail: sales@asia-icom.com
URL: <http://www.asia-icom.com>

Icom Canada

Glenwood Centre #150-6165 Highway 17,
Delta, B.C. V4K 5B8, Canada
Phone: +1 (604) 952-4266
Fax: +1 (604) 952-0090
E-mail: info@icomcanada.com
URL: <http://www.icomcanada.com>

Icom (Europe) GmbH

Communication Equipment
Himmelgeister Str. 100,
D-40225 Düsseldorf, Germany
Phone: +49 (0)211 346047
Fax: +49 (0)211 333639
E-mail: info@icom-europe.com
URL: <http://www.icomeurope.com>

Icom France s.a.s.

Zac de la Plaine,
1 Rue Brindejonc des Moulinais, BP 45804,
31505 Toulouse Cedex 5, France
Phone: +33 (5) 61 36 03 03
Fax: +33 (5) 61 36 03 00
E-mail: icom@icom-france.com
URL: <http://www.icom-france.com>

Beijing Icom Ltd.

10007, Long Silver Mansion, No.88, Yong Ding
Road, Haidian District, Beijing, 100039, China
Phone: +86 (010) 5889 5391/5392/5393
Fax: +86 (010) 5889 5395
E-mail: bjicom@bjicom.com
URL: <http://www.bjicom.com>

Icom (Australia) Pty. Ltd.

Unit 1 / 103 Garden Road,
Clayton, VIC 3168 Australia
Phone: +61 (03) 9549 7500
Fax: +61 (03) 9549 7505
E-mail: sales@icom.net.au
URL: <http://www.icom.net.au>

Icom Spain S.L.

Ctra. Rubi, No. 88 "Edificio Can Castanyer"
Bajos A 08174, Sant Cugat del Valles,
Barcelona, Spain
Phone: +34 (93) 590 26 70
Fax: +34 (93) 589 04 46
E-mail: icom@icomspain.com
URL: <http://www.icomspain.com>

Icom Polska

81-850 Sopot, ul. 3 Maja 54, Poland
Phone: +48 (58) 550 7135
Fax: +48 (58) 551 0484
E-mail: icompolska@icompolska.com.pl
URL: <http://www.icompolska.com.pl>

Your local distributor/dealer:

Point electronics

A- 1060 Wien, Stumpergasse 41 - 43

Tel.: +43/ 1/ 597 08 80/0

FAX: +43/ 1/ 597 08 80/40

www.point.at www.icom.at
mail@point.at