



PRE-RELEASE INFORMATION

GMDSS MF/HF TRANSCEIVER with CLASS A DSC

GM800



Day mode display (DSC scan screen)



GMDSS

Global Maritime Distress and Safety System

Reliable Performance
for MF/HF Long Distance Communication

Satisfies the SOLAS Carriage Requirements
for a MF/HF Class A DSC Radio

Will Meet MED* "Wheel Mark" Requirements

* Type approval pending as of November, 2015.

Large and High Contrast 4.3 inch Color
TFT LCD with Day and Night Mode

New Intuitive User Interface
for Straightforward Operation

IPX7 Waterproof Construction
(Controller only)



MED

(Type approval pending
as of November, 2015.)

IPX7

(Controller only)



Night mode display

Please Note: The complete GMDSS installation for MF/HF DSC (Class A) and telephony additionally requires the optional antenna tuner, AT-141.

Satisfies SOLAS Carriage Requirements

The GM800 meets the GMDSS requirements as required for SOLAS regulated commercial vessels engaging in international voyage. The GM800 will meet the MED*, "wheel mark" requirements for European merchant ships.

* Type approval pending as of November, 2015.

ITU Class A DSC (ITU-R M.493-13)

A dedicated DSC watch receiver continuously scans the six distress channels in rotation. The DSC Multi-task function shows up to seven DSC procedures. The GM800 is also capable of sending a distress relay call.

Large 4.3 inch Color TFT LCD

The color TFT LCD offers user-friendly icons and display design. The improved font allows quick recognition of screen information. You can select the day and night modes according to the lighting conditions.

New Intuitive User Interface

Menu items are shown with user-friendly icons and that can be navigated via the main dial knob or the up and down keys. Often-used functions are lined up at the bottom of the display and can be toggled with the left and right keys.

And More

- IPX7 waterproof construction for controller (1m depth of water for 30 minutes)
- 125W* (PEP) output power
 - * 85W (PEP) 1.6-3.999MHz
- Built-in 24V DC-DC converter
- 57mm diameter front speaker
- IEC 61162-1 for GPS connection
- Unified design with GM600 (VHF)

Supplied accessories:

- Handset, HS-98
- Mounting brackets
- DC power cable

SPECIFICATIONS

GENERAL	
Frequency range	Tx 1.6-27.5000MHz (ITU marine channels) Rx 0.5-29.9999MHz (continuously) DSC 2.1875, 4.2075, 6.3120, 8.4145, 12.5770, 16.8045MHz
Type of emission	Tx/Rx J3E (USB/LSB)*, J2B (AFSK), F1B (FSK), A1A* (CW), H3E* (AM) DSC F1B * Receive only
Number of channels	1237 channels (maximum) (160 user-programmable; 249 ITU SSB duplex; 72 ITU SSB simplex; 21 C1; 31 C2; 704 ITU FSK duplex)
Power supply requirement	21.6-31.2V DC (24V DC) (floating ground)
Current drain (approx. at 24V)	Tx Maximum power Rx Maximum audio
Operating temperature range	-15°C to +55°C
Antenna impedance	50Ω (SO-239x2)
Frequency stability	Tx/Rx ±10Hz (0.5-29.9999MHz) DSC ±10Hz
NMEA Interface	GGA, GNS, GLL, RMC
TRANSMITTER	
Rated output power (at AT-141 output power)	85W PEP (1.6-3.999MHz) 125W PEP (4.0-27.500MHz)
Spurious emissions	43dB below peak output power (Maximum power)
Carrier suppression	40dB below peak output power (Maximum power)
Unwanted sideband suppression	55dB below peak output power (Max. power) (With 1000Hz AF input)

RECEIVER			
Squelch sensitivity			
	0.5-1.599MHz	1.6-3.999MHz	4.0-29.999MHz
J3E, A1A (20dB SINAD)	30dBμV emf.	16dBμV emf.	11dBμV emf.
H3E (20dB SINAD)	44dBμV emf.	30dBμV emf.	-
	1.6-2.099MHz	2.1-27.500MHz	
J2B, F1B (1% error rate)	3dBμV emf.	0dBμV emf.	-
DSC (J2B) (1% error rate)	0dBμV emf. (2.1875, 4.2075, 6.3120, 8.4145, 12.5770, 16.8045MHz)		
Squelch sensitivity (at signal strength meter)	J3E	(Threshold/Tight) Less than +20dBμV/Less than +90dBμV (at 12.230MHz) Less than +30dBμV/Less than +110dBμV (at 1.000MHz)	
Spurious response rejection	J3E	More than 60dB (0.5-29.999MHz)	
Audio output power	J2B	More than 90dBμV emf.	
	Internal SP	2W with 8Ω load (at 10% distortion)	
	External SP	4W with 4Ω load (at 10% distortion)	
Clarity variable range	±150Hz		

All stated specifications are subject to change without notice or obligation.

Applicable IP Rating


Ingress Protection Standard	
Water	IPX7* (1m depth of water for 30 minutes) * Controller only

OPTIONS


Some options may not be available in some countries. Please ask your dealer for details.

<p>AT-141 AUTOMATIC ANTENNA TUNER</p>  <p>IP56 rating for dust and powerful water jet protection.</p>	<p>OPC-1465 SHIELDED CONTROL CABLE</p>  <p>10m; 32.8ft cable</p>
<p>MB-108 MOUNTING BRACKET</p>  <p>Photo shows installation example.</p>	<p>HM-214H SPEAKER-MICROPHONE</p> 
<p>HS-98 HANDSET</p> 	<p>SP-24E EXTERNAL SPEAKER</p>  <p>Input impedance: 4Ω. Maximum input power: 7W.</p>

INTERCONNECTION DIAGRAM

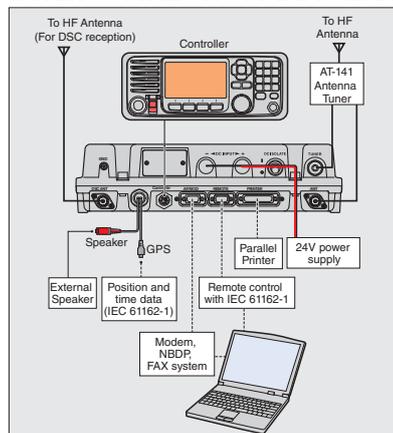

DIMENSIONS

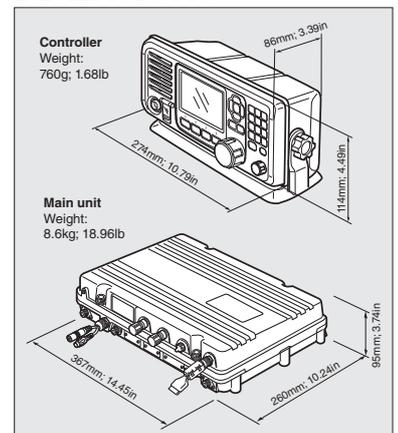

This device has not been approved by the appropriate authorities in each country. This device may not be sold or leased, or be offered for sale or lease, until approval has been obtained. All stated features, appearances, screen shots and specifications may be subject to change without notice. Icom, Icom Inc. and Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand and/or other countries. All other trademarks are the properties of their respective holders.

Icom Inc.

1-1-32, Kami-minami, Hirano-Ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

www.icom.co.jp/world

Count on us!

Icom America Inc.

12421 Willows Road NE, Kirkland, WA 98034, U.S.A.
Phone: +1 (425) 454-8155
Fax: +1 (425) 454-1509
E-mail: sales@icomamerica.com
URL: <http://www.icomamerica.com>

Icom Canada

Glenwood Centre #150-6165 Highway 17A, Delta, B.C., V4K 5B8, Canada
Phone: +1 (604) 952-4266
Fax: +1 (604) 952-0090
E-mail: info@icomcanada.com
URL: <http://www.icomcanada.com>

Icom Brazil

Rua Itororó, 444 Padre Eustáquio Belo Horizonte MG, CEP: 30720-450, Brazil
Phone: +55 (31) 3582 8847
Fax: +55 (31) 3582 8987
E-mail: sales@icombrasil.com

Icom (Europe) GmbH

Communication Equipment Auf der Krautweide 24 65812 Bad Soden am Taunus, Germany
Phone: +49 (6196) 76685-0
Fax: +49 (6196) 76685-50
E-mail: info@icom-europe.com
URL: <http://www.icom-europe.com>

Icom Spain S.L.

Ctra. Rubi, No. 88 "Edificio Can Castanyer" Bajos A 08174, Sant Cugat del Valles, Barcelona, Spain
Phone: +34 (93) 590 26 70
Fax: +34 (93) 589 04 46
E-mail: icom@icomspain.com
URL: <http://www.icomspain.com>

Icom (UK) Ltd.

Blacksole House, Altira Park, Herne Bay, Kent, CT6 6GZ, U.K.
Phone: +44 (0) 1227 741741
Fax: +44 (0) 1227 741742
E-mail: info@icomuk.co.uk
URL: <http://www.icomuk.co.uk>

Icom France s.a.s.

Zac de la Plaine, 1 Rue Brindjonec des Moulinais, BP 45804, 31505 Toulouse Cedex 5, France
Phone: +33 (5) 61 36 03 03
Fax: +33 (5) 61 36 03 00
E-mail: icom@icom-france.com
URL: <http://www.icom-france.com>

Icom (Australia) Pty. Ltd.

Unit 1 / 103 Garden Road, Clayton, VIC 3168 Australia
Phone: +61 (03) 9549 7500
Fax: +61 (03) 9549 7505
E-mail: sales@icom.net.au
URL: <http://www.icom.net.au>

Icom New Zealand

39C Rennie Drive, Airport Oaks, Auckland, New Zealand
Phone: +64 (09) 274 4062
Fax: +64 (09) 274 4708
E-mail: inquiries@icom.co.nz
URL: <http://www.icom.co.nz>

Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road, Taipei, Taiwan, R.O.C.
Phone: +886 (02) 2559 1899
Fax: +886 (02) 2559 1874
E-mail: sales@asia-icom.com
URL: <http://www.asia-icom.com>

Your local distributor/dealer:

Point electronics

A- 1060 Wien, Stumpergasse 43
Tel.: +43 / 1 / 597 08 80

www.point.at mail@point.at